
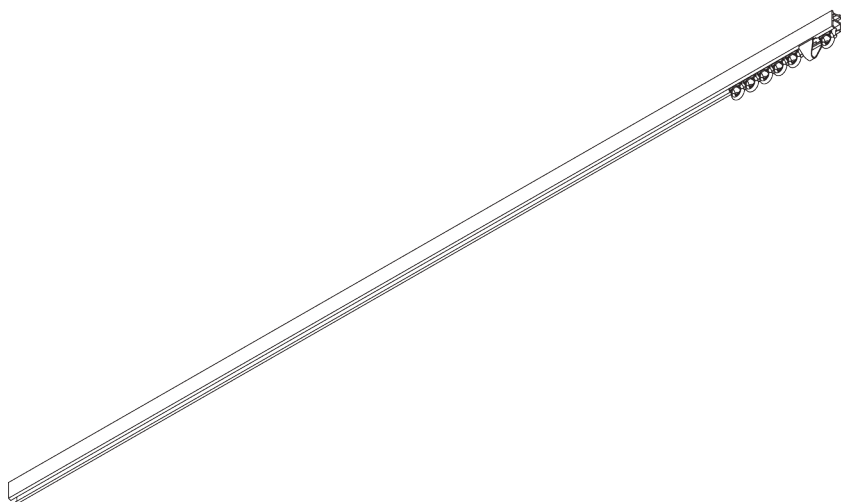


SG 1090



PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Bendable

SYSTEM SPECIFICATIONS


A. PROFILE

Profile and bending information




SG 1090p

Profile



B. HOW TO MEASURE

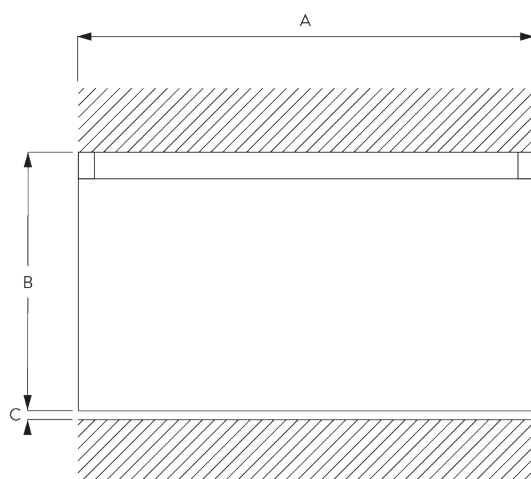

A: System width

B: System height

C: Distance between floor and fabric

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 1090 Hand Drawn Curtain Track System. Comprises aluminium profile SG1090 supplied made to measure in silver anodised or white powder coated, alternatively a specified RAL colour. SG 3533 at 14/m and 2 end stops SG 3070 per length. Top fix with SG 3176/3113/ 3115. Wall fix with SG 3176 w. SG Smart Fix at max. 400 mm centres.

SV

Silent Gliss SG 1090 handdragssystem. Består av aluminiumprofil SG 1090 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533 glid per meter samt 2 st SG 3070 vridstopp per system. Takmonteras med fäste SG 3176/3113/3115 c/c 400 mm. Väggmontering med SG 3176 med Smart Fix c/c 400 mm.

NO

Silent Gliss SG 1090 manuell gardinskinne. Består av aluminiumprofil SG 1080 i spesifisert lengde, standard i hvitlakkert eller alu natur. Kan også leveres i spesifisert RAL farge. 14 stk SG 3533 glidere pr meter, 2 stk SG 3070 stopper pr system. Takmonteres med feste SG 3176/3113/3115 c/c 400 mm. Veggmontering med SG 3176 med Smart Fix c/c 400 mm.

DA


Silent Gliss SG 1090 håndtrukket gardinskinnesystem. Består af en aluminiumprofil SG1090 i ønsket længde, sølvanodiseret eller hvid pulverlakering, alternativt en specificeret RAL-farve. 14 stk. SG 3533 pr. m og 2 stk. SG 3070 endestop pr. længde. Loftmonteres med SG 3176/3113/ 3115. Vægmonteres med SG 3176 med SG Smart Fix med en afstand på højst 400 mm.

FITTING

A. FITTING INFORMATION



Fixing points

For detailed fitting information, visit the Silent Gliss website.




B. CEILING FITTING

Bracket SG 3176

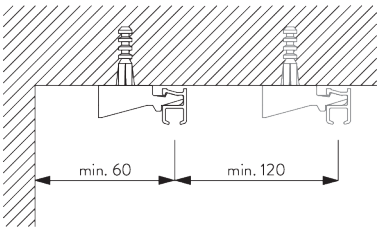


SG 3176
Bracket


Double ceiling bracket SG 3113 / SG 3115

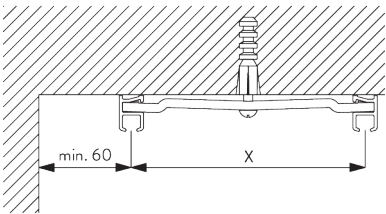


Support	X mm
SG 3113	57
SG 3115	80




SG 3113
Bracket



SG 3115
Bracket




SG 3255
Cover




SG 3256
Cover

C. WALL FITTING

Bracket SG 3175






SG 3175


Bracket

Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3176:
Screw SG 10277 (M4x12) needed.

Smart Fix	X mm
SG 11200 / SG 11210	68
SG 11201 / SG 11211	88
SG 11202 / SG 11212	108
SG 11203 / SG 11213	128
SG 11204 / SG 11214	158
SG 11205 / SG 11215	208



Square Smart Fix SG 11210 - SG 11215 and bracket SG 3176:
Screw SG 10277 (M4x12) needed.




SG 3176

Bracket




SG 10277

Pan head screw M4x12




SG 11200

Smart Fix 60 mm




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11205

Smart Fix 200 mm




SG 11210

Square Smart Fix 60 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm



SG 11214

Square Smart Fix 150 mm



SG 11215

Square Smart Fix 200 mm

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting


- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

Child Safety















- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.


PARTS

A. STANDARD PARTS

	SG 1090p Profile
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider

B. OPTIONAL PARTS


	SG 3016 End stop		SG 3535 Glider
	SG 3020 Hook		SG 3537 Glider
	SG 3032 Spring stop		SG 3548 Glider
	SG 3071 End stop		SG 3549 Click glider with hook
	SG 3096 Connection bridge		SG 3570 Glider
	SG 3113 Bracket		SG 3571 Hook
	SG 3115 Bracket		SG 3582 Hook
	SG 3151 Spacer		SG 3598 Eyelet
	SG 3175 Bracket		SG 3599 Hook
	SG 3176 Bracket		SG 10277 Pan head screw M4x12
	SG 3255 Cover		SG 10430 Draw rod 50 cm
	SG 3256 Cover		SG 10431 Draw rod 75 cm
	SG 3511 Glider		SG 10432 Draw rod 100 cm
	SG 3534 Glider 3533 on strip		SG 10433 Draw rod 125 cm

**SG 10434**


Draw rod 150 cm

**SG 10492**


Pan head screw M4x8

**SG 11200**


Smart Fix 60 mm

**SG 11201**

Smart Fix 80 mm

**SG 11202**

Smart Fix 100 mm

**SG 11203**


Smart Fix 120 mm

**SG 11204**


Smart Fix 150 mm

**SG 11205**


Smart Fix 200 mm

**SG 11210**


Square Smart Fix 60 mm

**SG 11211**


Square Smart Fix 80 mm

**SG 11212**


Square Smart Fix 100 mm

**SG 11213**


Square Smart Fix 120 mm

**SG 11214**

Square Smart Fix 150 mm

**SG 11215**

Square Smart Fix 200 mm

**SG 11335**

End stop

