
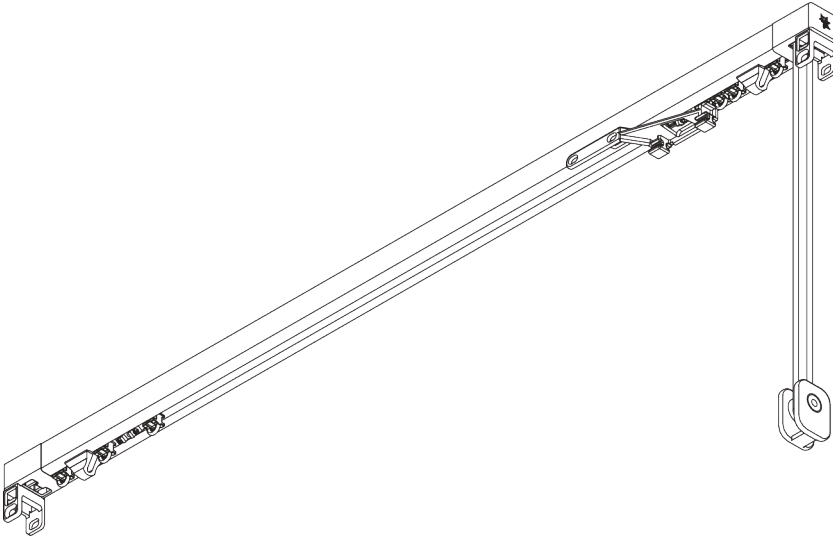


SG 3870



PRODUCT INFORMATION

- **Operation:** cord
- **Range:** M - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible (recess profile only in white RAL 9016 or special color)
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- 2-component (2C) glider technology
- Wave (2C)
- Bendable
- Bendable recess profile

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS



6 m



14 kg

Max. curtain weight -
2C glider or roller

	2 m	4 m	6 m
	12	11	10
	14	13	12
	9	8	7
	10	9	6
	6	5	4
	7	6	5
	5	4	3
	6	5	4

(kg max.)


Max. curtain weight -
Wave 2C glider cord

	2 m	4 m	6 m
	5	8	7
	5	8	8
	5	6	5
	5	6	6
	4	3	-
	4	4	3
	3	2	-
	3	3	-

(kg max.)


B. PROFILE

Profile and bending
information



SG 11190

Profile




SG 11230

Recess profile



C. HOW TO MEASURE

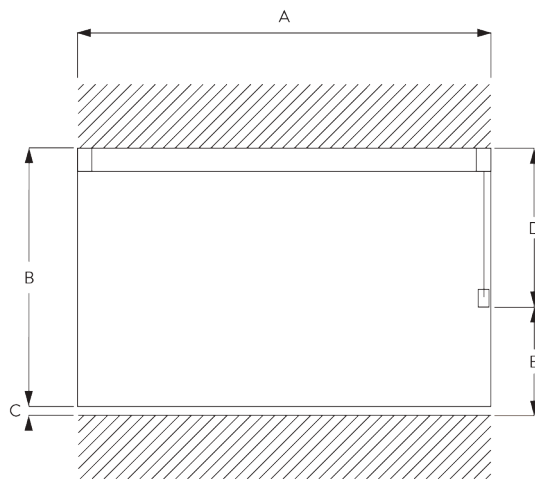

A: System width
B: System height
C: Distance between floor and fabric
D: Cord height
E: Safety Retainer SG 10731 min. 150 cm above floor

D. SPECIFICATION

TEXT

EN

Silent Gliss SG 3870 Cord Operated Curtain Track System. Comprising aluminium profile SG11190 supplied made to measure in silver anodised or powder coated in white. Supplied with 2C gliders SG 11300 at 14/m. Top fixed with fixing clamp SG 3825/3826/3832 at max. 500 mm centres. Wall fix with SG Smart Fix. Optional recess profile SG 11230. Silent Gliss Wave option is available. Compliant to Child Safety legislation EN 13120.

SV

Silent Gliss SG 3870 lindragssystem. Består av aluminiumprofil SG 11190 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st 11300 SILENT TRACK glid per meter. Takmonteras med fäste SG 3825 c/c 500 mm. Vägghöjning med SG Smart Fix c/c 500 mm. Kan levereras med infällningsprofil SG 11230. Uppfyller barnsäkerhetsnorm EN 13120. Kan användas med system Wave.

NO

Silent Gliss SG 3870 Snortrekssystem. Består av aluminiumprofil SG 11190 i spesifisert lengde. Hvitlakkert, alu natur eller spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glide per meter. Takmonteres med fester SG 3825 c/c 500 mm. Veggmontering med SG Smart Fix c/c 500 mm. Kan leveres med profil for innfelling SG 11230. Oppfyller kravene i barnesikkerhetsnormen EN13120. kan brukes med Wave system.

DA


Silent Gliss SG 3870 gardinskinnesystem med snortræk. Består af aluminiumprofil SG11190 i ønsket længde, sølv-anodiseret eller hvid pulverlakering. Leveres med 14 stk. 2C glide SG 11300 pr. m. Loftmonteres med spændebøjle SG 3825/3826/3832 med højst 500 mm afstand. Vægmonteres med SG Smart Fix. Kan leveres med indfældningsprofil SG 11230. Kan bruges med Silent Gliss Wave. Overholder lovgivning om barnesikkerhed efter EN 13120.

FITTING

A. FITTING INFORMATION



Fixing points

For detailed fitting information, visit the Silent Gliss website.





B. CEILING FITTING

Clamp SG 3825

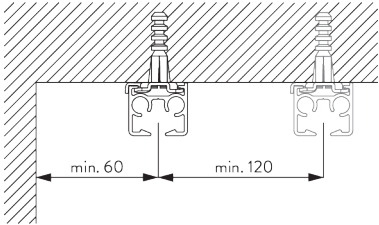



SG 3825
Clamp

Bracket SG 3826

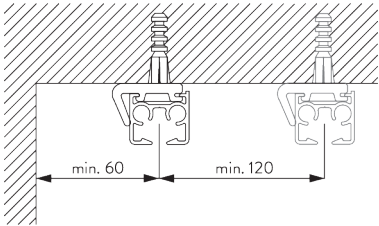

SG 3826
Bracket


Bracket SG 3832

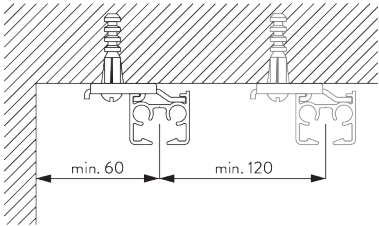


SG 3832
Bracket

C. WALL FITTING


Smart Fix




Smart Fix SG 11200 - SG 11205 and bracket SG 3826:
Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3826:
Screw SG 10492 (M4x8) needed.

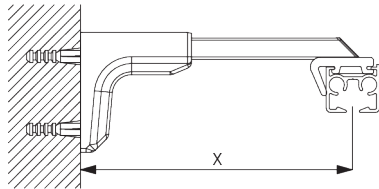

Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3826:
Screw SG 10277 (M4x12) needed.




Smart Fix SG 11200 - SG 11205 and bracket SG 3832:
Screw SG 10492 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and bracket SG 3832:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm (SG 3826 / SG 3825)	X mm (SG 3832)
SG 11200 / SG 11210	52	70
SG 11201 / SG 11211	72	90
SG 11202 / SG 11212	92	110
SG 11203 / SG 11213	112	130
SG 11204 / SG 11214	142	160
SG 11205 / SG 11215	192	210
SG 11154	102-130	120-148
SG 11155	132-160	150-178
SG 11156	182-210	200-228

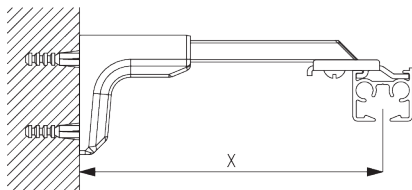


Universal Smart Fix SG 11154 - SG 11156 and bracket SG 3832:

Screw SG 10407 (M4x10) needed.




Smart Fix SG 11200 - SG 11205 and clamp SG 3825:

Screw SG 10074 (M4x8) needed.




Square Smart Fix SG 11210 - SG 11215 and clamp SG 3825:

Screw SG 10074 (M4x8) needed.

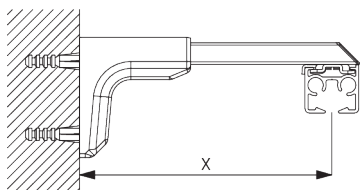


Universal Smart Fix SG 11154 - SG 11156 and clamp SG 3825:

Screw SG 11158 (M4x12) needed.




SG 3825

Clamp



SG 3826

Bracket



SG 3832

Bracket



SG 10074

Countersunk head screw
M4x8



SG 10277

Pan head screw M4x12



SG 10407

Pan head screw M4x10




SG 10492

Pan head screw M4x8




SG 11158


Countersunk head screw
M4x12




SG 11200
Smart Fix 60 mm




SG 11201
Smart Fix 80 mm




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11205
Smart Fix 200 mm




SG 11210
Square Smart Fix 60 mm




SG 11211
Square Smart Fix 80 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm




SG 11215
Square Smart Fix 200 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm

Bracket SG 3836

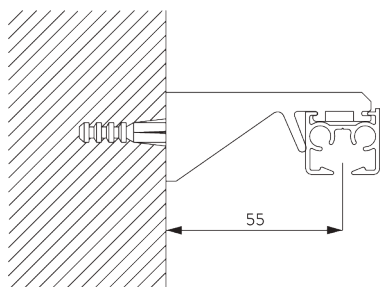


SG 3836
Bracket




D. RECESS FITTING

Recess profile SG 11230




One wedge SG 10157 per fixing point.
For detailed recess fitting, visit the Silent Gliss website.




SG 11230

Recess profile



SG 11238

Recess Mask




SG 10157


Wedge

SYSTEM OPTIONS

A. WAVE




SG 11295



SG 11302

Standard components:


- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm



SG 6364




SG 6365



SG 11303

Optional components:


- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 11303 Wave 2C glider Cord 60 mm

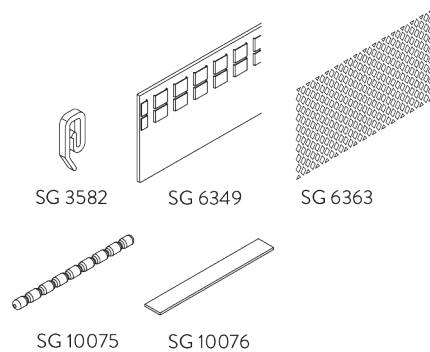

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

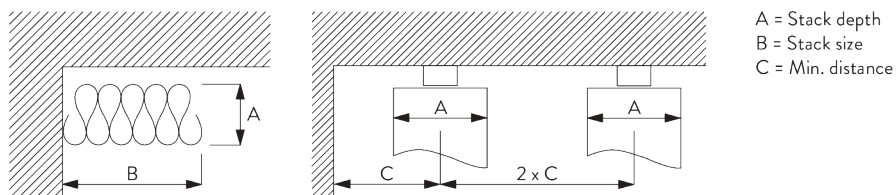

2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80

*Stack size B standard

- single stack = plus 130 mm per curtain
- pair stack = plus 30 mm per curtain

*Stack size B optional

- single stack = plus 200 mm per curtain
- pair stack = plus 200 mm per curtain

GENERAL NOTES

Dimensions

- *Measurements are in mm except where indicated.*
- *Max. kg relates to fabric incl. accessories.*
- *Stack size depends on curtain make-up and fabric thickness.*
- *Distance between gliders max. 80 mm / distance between rollers max. 100 mm.*
- *Recommended distance floor / fabric: 20 mm.*
- *In order to determine system height (B), the smallest room height must be taken into account.*
- *Full functionality may be affected if the curtain touches the profile.*

Fitting




- *Installation by qualified fitter only.*
- *Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.*
- *Qualified fitter must use appropriate screws / fixings for each situation.*
- *Profile lip if applicable to be installed to room side.*

Child Safety






- *All relevant Silent Gliss systems correspond to child safety EN 13120.*
- *All parties involved must comply with EN 13120.*













PARTS


A. STANDARD PARTS

	SG 3090 Cord ø 3.5 mm
	SG 3825 Clamp
	SG 6086 Spring stop
	SG 6288 Overlap arm
	SG 10731 Child safety retainer set
	SG 11190 Profile
	SG 11285 Guide set
	SG 11300 2C glider


B. OPTIONAL PARTS

	SG 3340 Cord/chain weight
	SG 3582 Hook
	SG 3735 Cord weight with tensioner
	SG 3802 Connection bridge
	SG 3826 Bracket
	SG 3832 Bracket
	SG 3836 Bracket
	SG 6053 Spring stop
	SG 6063 Overlap arm
	SG 6094 Roller
	SG 6098 Roller
	SG 6283 Roller
	SG 6349 Wave curtain tape
	SG 6363 Wave top hemming tape


	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 10074 Countersunk head screw M4x8
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10157 Wedge
	SG 10277 Pan head screw M4x12
	SG 10407 Pan head screw M4x10
	SG 10492 Pan head screw M4x8
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11158 Countersunk head screw M4x12
	SG 11200 Smart Fix 60 mm

**SG 11201**

Smart Fix 80 mm

**SG 11202**

Smart Fix 100 mm

**SG 11203**


Smart Fix 120 mm

**SG 11204**


Smart Fix 150 mm

**SG 11205**


Smart Fix 200 mm

**SG 11210**


Square Smart Fix 60 mm

**SG 11211**


Square Smart Fix 80 mm

**SG 11212**


Square Smart Fix 100 mm

**SG 11213**


Square Smart Fix 120 mm

**SG 11214**


Square Smart Fix 150 mm

**SG 11215**


Square Smart Fix 200 mm

**SG 11230**

Recess profile

**SG 11238**


Recess Mask

**SG 11295**

End stop

**SG 11301**

2C glider on strip

**SG 11302**

Wave 2C glider cord 80 mm

**SG 11303**

Wave 2C glider cord 60 mm