
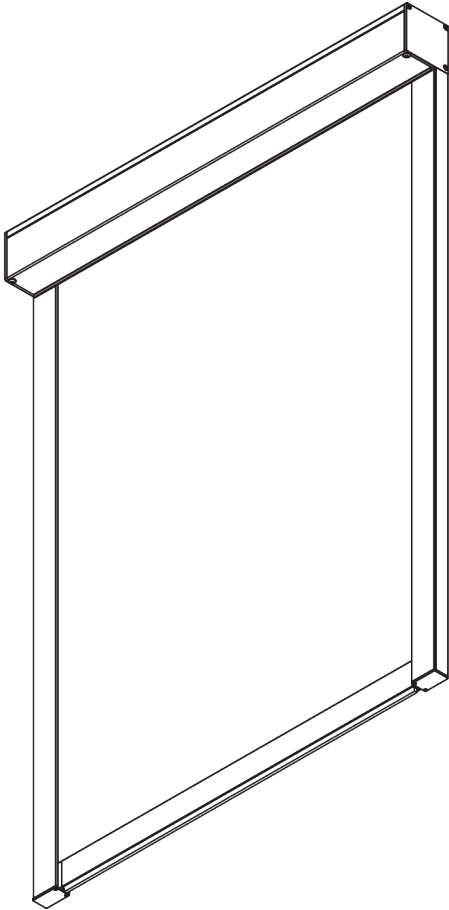


# SG 4760

---



## PRODUCT INFORMATION


- **Operation:** motorised
- **Range:** S
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016 or black RAL 9005, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

### **Features:**


- Zip technology
- Quiet and fast motors
- Soft stop
- Various control options
- 40 mm side channel, pre-drilled fixing points

# SYSTEM SPECIFICATIONS

## A. SYSTEM DIMENSIONS



1.6 m



65 cm



1.6 m




2.5 m<sup>2</sup>




2 kg

## B. PROFILE


### Profile information




**SG 10994**  
Box case 73 mm




**SG 10995**  
Box cover 73 mm




**SG 10532**  
Tube ø 41 mm




**SG 10993**  
Bottom bar



**SG 11418**  
Side guide case




**SG 11419**  
Side guide cover



**SG 11421**  
Zip profile

## C. HOW TO MEASURE


### Inside fitting

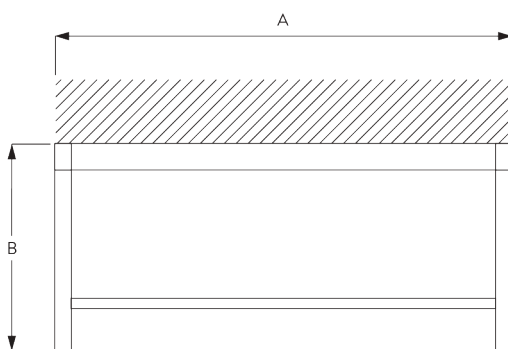

A: System width  
B: System height



## Face fitting

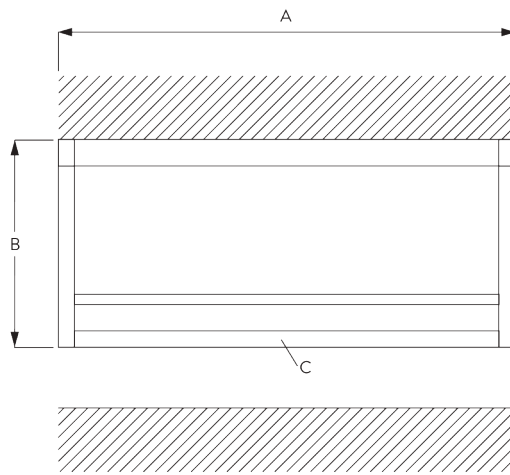

- A: System width
- B: System height
- C: Optional: end profile (SG 11418 / SG 11419)

## D. SPECIFICATION

### TEXT

#### EN

Silent Gliss SG 4760 Electrically Operated Dim-Out Roller Blind System with SG Series 20 motors. For blinds up to 1.6m wide by 1.6m drop, max 2.5sq.m. Supplied complete and made to measure comprising aluminium headbox SG 10994-5 (73 mm), side profiles SG 11418 / SG 11419 and bottom hem bar SG 10993 in white or black powder coat finish as standard.

Fabric edges retained by two component zip profile SG 11421. Operation by mains switch (not supplied) or mains switching by third party control system or SG 0450 remote control system (wireless controls at extra cost). All wiring to be strictly in accordance with Silent Gliss wiring diagrams. Fabric to be chosen from the Silent Gliss fabric range, Price Group 1R / 2R / 3R.

#### SV

Silent Gliss SG 4760 mörkläggningsrullgardin med motor serie 20. För system max 1,6 x 1,6 m, eller totalt max 2,5 m<sup>2</sup>. Levereras komplett i kundmått bestående av toppkassett i aluminium SG 10994-5 (73 mm), sidoprofiler SG 11418 / SG 11419 samt tyngdprofil SG 10993 i vit eller svart epoxy lack. Textilens kant försedd med zip profil SG 11421. Integrerad 230V motor SG 10320 / (SG 10321 radiomottagare) vänster / höger sida. Styrning via väggkontakt (ej inkluderad), via fjärrkontroll eller via externt styrsystem. All elinstallation skall följa Silent Gliss kopplingschema. Textil från Silent Gliss textilprogram i prisgrupp 1-3.

#### NO


Silent Gliss SG 4760 Mørkleggende rullegardin med motor serie 20. For system inntil 1,6 x 1,6 m, eller totalt max 2,5 m<sup>2</sup>. Levereras komplett måltilpasset. Består av toppkasse i aluminium SG 10994-5 (73 mm), sideprofiler SG 11418 / SG 11419 samt tyngdeprofil SG 10993 i hvit eller svart epoxy lakk. Sidene på tekstilet er festet med zip profil SG 11421. Integrert 230V motor SG10320/ (SG 10321 radiomottaker) venstre eller høyre side. Betjenes med veggbryter (ikke inkludert), fjernkontroll eller via eksternt styrsystem. Ved alle elektriske installasjoner skal Silent Gliss koblingskjema benyttes. Tekstiler fra Silent Gliss tekstilkolleksjon i prisgrupp 1-3.

# FITTING


## A. FITTING INFORMATION

For detailed fitting information, visit the Silent Gliss website.


**Inside fitting - fixing points**

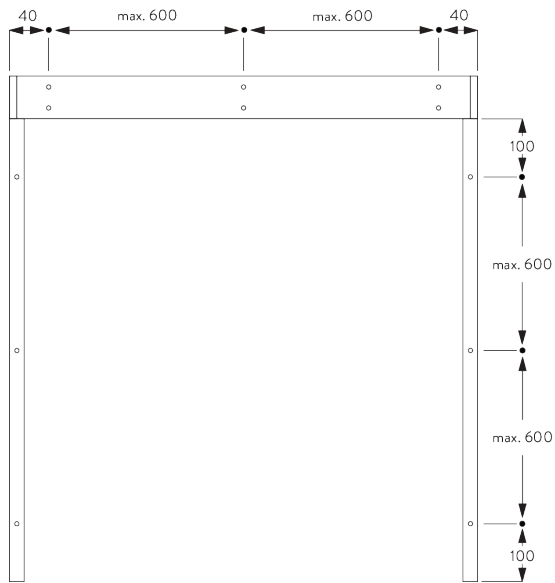


**Face fitting - fixing points**

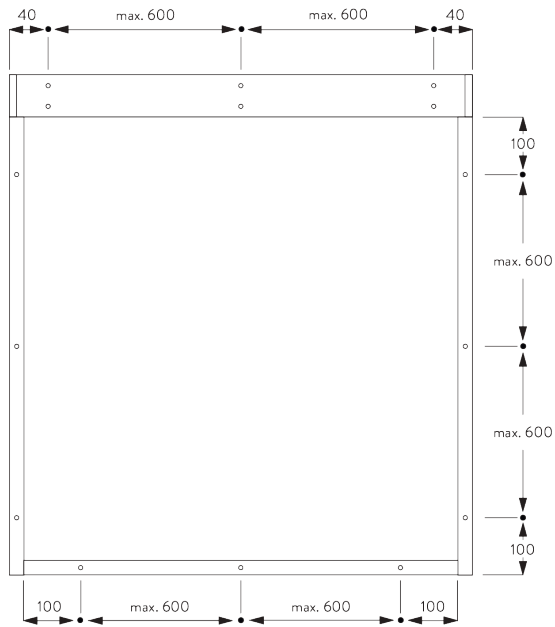


**B. CEILING FITTING**

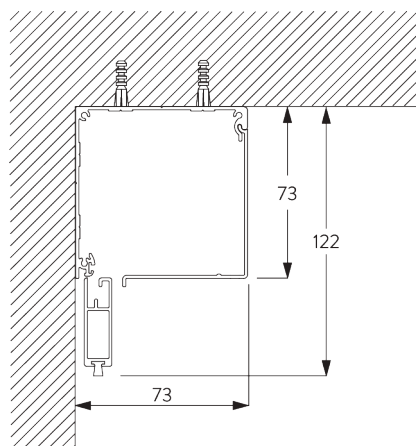

**C. WALL FITTING**

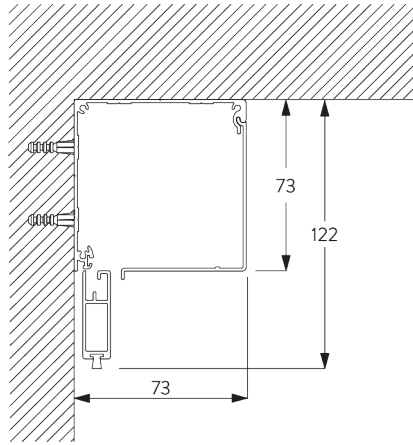


**D. RECESS FITTING**

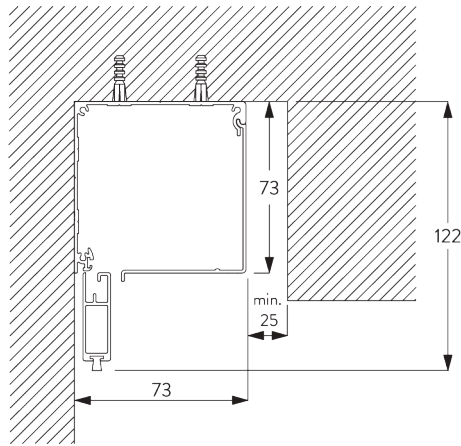


**E. SIDE PROFILES**  
**SG 11418 / SG 11419**

Inside fitting

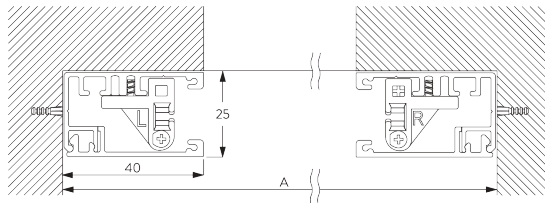

A: System width

Face fitting

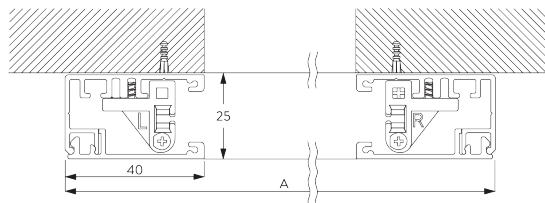

A: System width

# MOTORS & CONTROLS

## A. MOTOR FEATURES

Motors	20-Series	20-Series	10-Series K	5-Series
	SG 10523	SG 10522	SG 10514	SG 10715

### Motor Features

Soft stop	●	●		
Electronic end-stop	●	●		
Electronic revolution counter (unlimited revolution)	●	●		
Mechanical end-stop			●	●
Mechanical revolution counter (limited revolution)			●	●
Two intermediate positions possible	●			
Noiseless stop	●	●	●	
Parallel wiring possible without additional relays	●	●		
Disconnectable motor cable	●	●		
IP class	IP 44	IP 44	IP 44	IP 44

### Control Features

Mains power control	●	●	●	●
SG Control L (built-in receiver)	●			
Suitable for most major home automation systems (with suitable interface)	●	●	●	●

## B. MOTOR SPECIFICATIONS

Motors	Min. system width	Voltage	Current	Frequency	Speed	Frequency receiver
<b>20-Series</b>						
SG 10522 (standard)	65 cm	230 V AC	0.55 A	50 Hz	30 rpm	-
SG 10523	65 cm	230 V AC	0.55 A	50 Hz	30 rpm	868/915 MHz
<b>10-Series K</b>						
SG 10514	65 cm	230 V AC	0.52 A	50 Hz	30 rpm	-
<b>5-Series</b>						
SG 10715	65 cm	230 V AC	0.485 A	50-60 Hz	28 rpm	-

## C. OPERATING METHODS

See catalogue "controls" for details.

### Wall Switch



System can be operated by fixed wall switch.

### SG Control L



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

#### **D. WIRING** **DIAGRAMS**



Refer to Silent Gliss website.

## **GENERAL NOTES**

### **Dimensions**

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, etc.).

### **Fitting**







































- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!

### **Child Safety**

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.


# PARTS

## A. STANDARD PARTS

	<b>SG 4226</b> Double tape 30 mm		<b>SG 10994</b> Box case 73 mm		<b>SG 11059</b> Pan head screw with flange M4x12
	<b>SG 4508</b> Brush 5x7 mm		<b>SG 10995</b> Box cover 73 mm		<b>SG 11060</b> Foam tape adhesive
	<b>SG 4509</b> Brush 5x12 mm		<b>SG 11004</b> End cover left 73 mm		<b>SG 11324</b> PT Screw Countersunk KA35x14
	<b>SG 6791</b> Pan head screw 3.9x32		<b>SG 11005</b> End cover right 73 mm		<b>SG 11418</b> Side guide case
	<b>SG 6933</b> PT Countersunk screw KA25x16		<b>SG 11011</b> Clip		<b>SG 11419</b> Side guide cover
	<b>SG 6936</b> PT Countersunk screw KA22x10		<b>SG 11013</b> Clip		<b>SG 11421</b> Zip profile
	<b>SG 6942</b> Pan head screw KA30x8		<b>SG 11014</b> Tube adapter		<b>SG 11473</b> Zip guide left
	<b>SG 9917</b> Hirschmann portable socket-outlet STAK 3 N		<b>SG 11016</b> Tube adapter		<b>SG 11474</b> Zip guide right
	<b>SG 10284</b> O-Ring		<b>SG 11025</b> Zip		<b>SG 11475</b> Side guide end cover left
	<b>SG 10522</b> Motor 230V AC, 20-Series S 3/30		<b>SG 11028</b> End cover left		<b>SG 11476</b> Side guide end cover right
	<b>SG 10532</b> Tube ø 41 mm		<b>SG 11029</b> End cover right		
	<b>SG 10623</b> Motor drive		<b>SG 11030</b> Cover		
	<b>SG 10668</b> PVC strip 10 mm		<b>SG 11034</b> Countersunk head screw 3.5x16		
	<b>SG 10993</b> Bottom bar		<b>SG 11035</b> Countersunk head screw 2.2x9.5		




## B. OPTIONAL PARTS




**SG 4951**

Bottom weight ø 8 mm




**SG 9916**

Hirschmann plug set




**SG 9960**

Move server set



**SG 9961**

Move transmitter



**SG 10293**

Cable 230V AC, 2/3/5/10 m



**SG 10300**

Radio hand held 1 channel




**SG 10302**

Radio hand held 5+1 channel



**SG 10303**

Radio hand held 10+2+1 channel



**SG 10514**

Tubular motor 230V AC, 10 Series S 3/30 K




**SG 10523**

Motor 230V AC, 20-Series S 3/30, radio receiver



**SG 10715**

Tubular motor 230V AC, 5 Series S 6/28



**SG 10804**

Radio hand held 15+5+1 channel



**SG 11480**

Radio wall transmitter 1 channel



**SG 11490**

Radio wall transmitter 5+1 channel





