
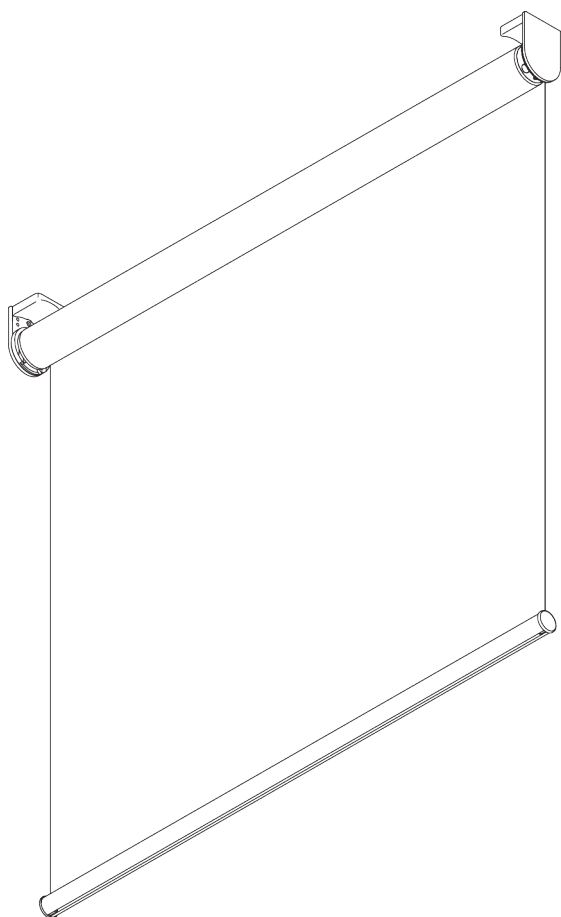


SG 4960



PRODUCT INFORMATION

- **Operation:** motorised
- **Range:** S - M
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Quiet and fast motors
- Soft stop
- Various control options
- Two connected systems
- Click-in brackets
- Fascia, box, installation profile

07/2021/V1

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS



Single system: 2.4 m
Double system: 4.8 m



61 cm*
*see motor specification table




4 m



Single system: 9.6 m²
Double system: 19.2 m²



5.5 kg



Recommended width /
height ratio
max. 1:3

Maximum system drop

Wall fitting (system drop on window side)


Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	400	400	400	400	400	400	390	350	320	290	270	250	230	220

Ceiling fitting / wall fitting (system drop on room side)

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	400	400	400	400	400	400	400	400	400	380	350	330	300	280

B. PROFILE


Profile information




SG 10532
Tube ø 41 mm




SG 4221
Bottom bar




SG 10633
Bottom bar




SG 11442
Bottom bar




SG 10534
Installation profile




SG 11430
Installation profile fascia 73 mm



SG 11530
Installation profile fascia 110 mm




SG 11431
Fascia round 73 mm




SG 11531

Fascia round 110 mm




SG 11432

Fascia square 73 mm




SG 11532

Fascia square 110 mm




SG 11433

Box case 73 mm




SG 11533

Box case 110 mm




SG 11434

Box cover 73 mm



SG 11534

Box cover 110 mm




SG 11542

Side guide channel

C. HOW TO MEASURE


incl. bracket covers

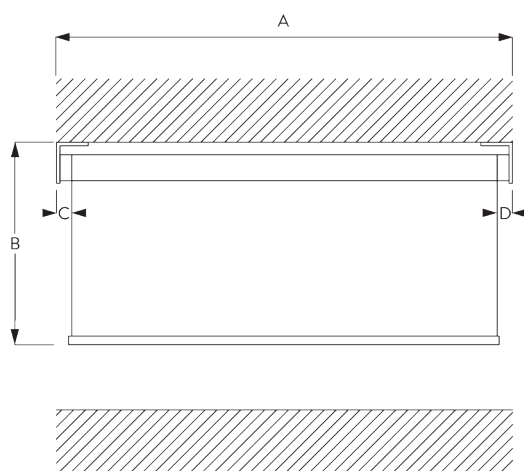

A: System width
B: System height
C: Light gap: 13 mm
D: Light gap operation side: 19 mm

Note:
Different light gaps see motor specifications.
All measurements include 2 mm for bracket cover per side!


Fascia / Box

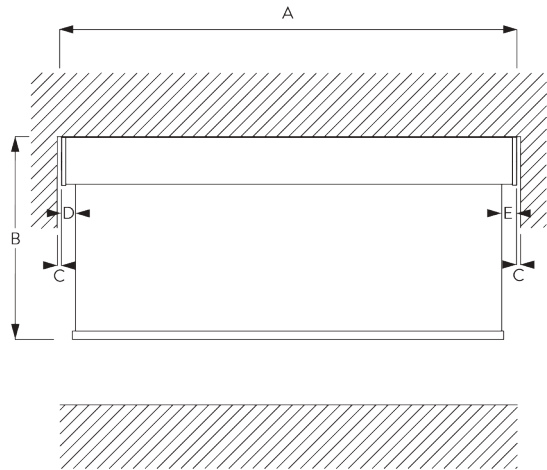

- A: System width
- B: System height
- C: Gap: min. 10 mm (when cover is used)*
- D: Light gap: 15 mm
- E: Light gap operation side: 21 mm

Note:
Different light gaps see motor specifications.
*Possible to make Fascia wider than system to reduce gap between wall and system.

Fascia / Box with Side Profiles SG 11542

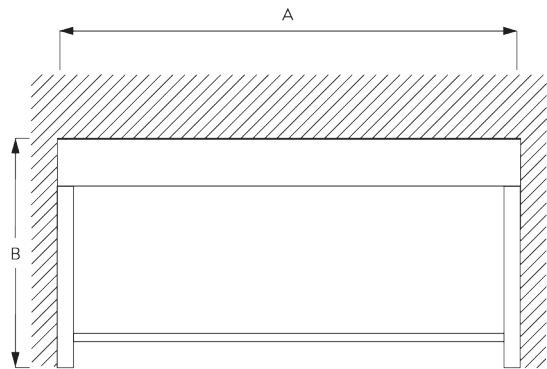

- A: System width
- B: System height

D. SPECIFICATION

TEXT

EN

Silent Gliss SG 4960 Electrically Operated Roller Blind System. Roller blind system for applications up to 2.4 m wide. Supplied made to measure and complete comprising anodised aluminium barrel SG 10532, 41 mm. Fixed to wall / ceiling / inside recess with brackets SG 10542 / SG 10543 and bracket covers SG 10574 / SG 10575. Optional installation profile SG 10534 for easy installation with clamps SG 10539. Brackets and hardware in white / grey / black finish. Assembled with powder coated white, alu or black finish aluminium bottom weight bar SG 4221 / SG 10633 / SG 10634. Connected system possible. Optional side guide wires. Integral 230V motor SG 10320 / (SG 10321 with radio receiver) left / right side. Operation by mains switch (not supplied), by remote control or mains switching by third party control system. All wiring to be strictly in accordance with Silent Gliss wiring diagrams. Fabric to be chosen from the Silent Gliss fabric range, Price Group 1-4.

SV

Silent Gliss SG 4960 rullgardinsystem med motor. Rullgardinsystem för installationer upp till 2.4 m bredd. Levereras komplett i specificerat mått innefattande anodiserat rör SG 10532, 41 mm. Vägg/tak och nischmontering med fästen SG 10542 / SG 10543 och täckplattor SG 10574 / SG 10575 i vitt / alu eller svart. Alternativt med installationsprofil SG 10534 som monteras med fästen SG 10539. Sidewire som tillbehör. Dubbelsystem möjligt. Monterad pulverlackerad tyngdprofil i aluminium i finish vitt / alu / svart med SG 4221 / SG 10633 / SG 10634. Integrerad 230V motor SG 10320 / (SG 10321 radiomottagare) vänster / höger sida. Styrning via väggkontakt (ej inkluderad), via fjärrkontroll eller via externt styrsystem. All elinstallation skall följa Silent Gliss kopplingsschema. Textil från Silent Gliss textilprogram i prisgrupp 1-4.

NO

Silent Gliss SG 4960 Rullegardinsystem med motor. Rullegardinsystem for maks. bredde på 2,4 meter. Leveres komplett på spesialmål med anodisert rør integrert, SG 10532, 41 mm. Tak-, vegg- og nischmontering med feste SG 10542 / SG 10543 samt dekkplate SG 10574 / SG 11175 i hvit, alu eller svart. Alternativt monteringsprofil SG 10534 som monteres med feste SG 10534. Sidewire som tilbehør. Dobbelsystem mulig. Montert tyngdeprofil i pulverlakkert aluminium i hvit / alu / svart med SG 4221 / SG 10633 / SG 10634. Integrert 230V motor SG 10320 / (SG 10321 radiomottaker) venstre eller høyre side. Styring med veggkontakt (ikke inkl.), via fjernkontroll eller eksternt styringssystem. Alle elektriske installasjoner skal gjøres i.h.t. Silent Gliss koblingsskjema. Tekstil fra Silent Gliss kolleksjon i prisgruppe 1-4.

DA

Silent Gliss SG 4960 elektrisk rullegardinsystem. Rullegardinsystemer til installationer med op til 2,4 m bredde. Leveres i ønsket længde og samlet. Består af anodiseret aluminiumrør SG 10532, 41 mm. Fastgøres i væggen / loftet / indfældes med beslagene SG 10542 / SG 10543 og beslagafdækningerne SG 10574 / SG 10575. Alternativt med installationsprofil SG 10534 for nem installation med klemmerne SG 10539. Beslag og armaturer i hvid / alu / sort finish. Samlet med pulverlakeret hvid, alu eller sort finish tyngdeprofil af aluminium SG 4221/ SG 10633 / SG 10634. Mulighed for tilsluttet system. Sidewirer som tilbehør. Integreret 230 V motor SG 10320 / (SG 10321 med radiomodtager) venstre / højre side. Styres med lysnetkontakt (medfølger ikke), med fjernbetjening eller lysnetkontakt fra tredjepart system. Al ledningsføring skal udelukkende vælges i henhold til Silent Gliss ledningsdiagrammer. Stoffet vælges fra Silent Gliss stofprogrammet, prisgruppe 1-4.

FITTING


A. FITTING INFORMATION

Fixing points

For detailed fitting information, visit the Silent Gliss website.




Brackets (wall / ceiling)




Fascia / box & installation profile SG 10534 (wall / ceiling)


B. CEILING FITTING




Brackets



Installation profile SG 10534 and clamps SG 3033 or SG 3044




Installation profile SG 10534 and click bracket SG 10539
Not possible with two connected systems!

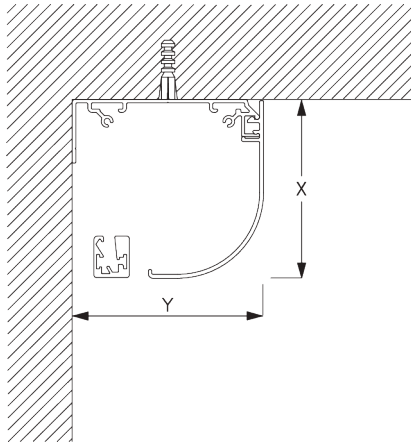

Fascia round

$X = \text{Fascia S } 73 \text{ mm} / \text{Fascia L } 110 \text{ mm}$


$Y = \text{Fascia S } 78 \text{ mm} / \text{Fascia L } 110 \text{ mm}$

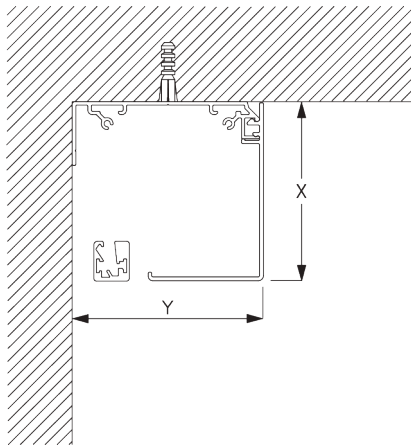

Fascia square

$X = \text{Fascia S } 73 \text{ mm} / \text{Fascia L } 110 \text{ mm}$


$Y = \text{Fascia S } 78 \text{ mm} / \text{Fascia L } 110 \text{ mm}$

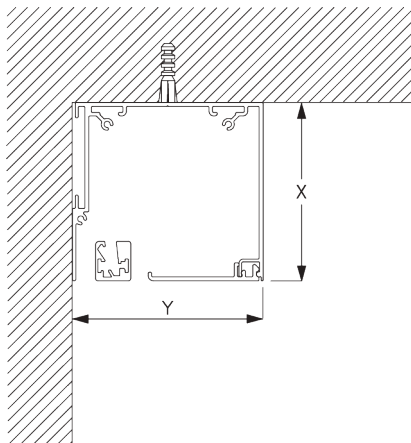

Box


$X = \text{Box S } 73 \text{ mm} / \text{Box L } 110 \text{ mm}$

$Y = \text{Box S } 78 \text{ mm} / \text{Box L } 110 \text{ mm}$




SG 3033

Clamp




SG 3044

Clamp




SG 10534

Installation profile




SG 10539


Bracket




SG 10542
Bracket




SG 10543
Bracket



SG 10574
Bracket cover




SG 10575
Bracket cover




SG 10690
Spacer


C. WALL FITTING




Brackets



Installation profile SG 10534 and clamps SG 3033 or SG 3044




Installation profile SG 10534 and click bracket SG 10539
Not possible with two connected systems!

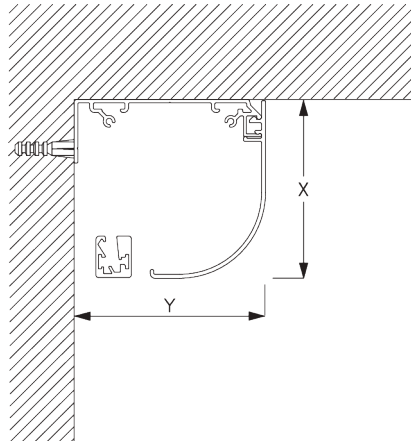


Fascia round

X = Fascia S 73 mm / Fascia L 110 mm
Y = Fascia S 78 mm / Fascia L 110 mm

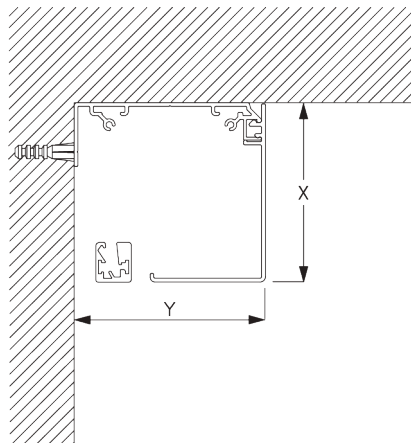

Fascia square


X = Fascia S 73 mm / Fascia L 110 mm
Y = Fascia S 78 mm / Fascia L 110 mm

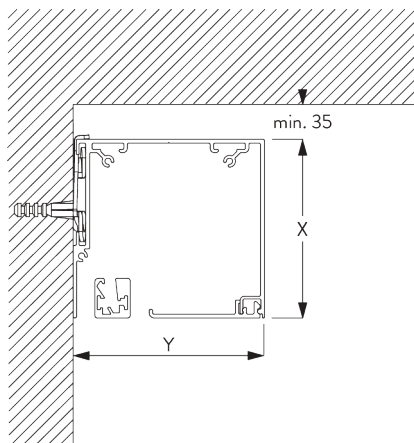

Box S and clamp SG 3044 / Box L and clamp SG 11180


X = Box S 73 mm / Box L 110 mm

Y = Box S 78 mm / Box L 110 mm




SG 3033

Clamp




SG 3044

Clamp




SG 11180

Clamp




SG 10534

Installation profile




SG 10539

Bracket




SG 10542

Bracket




SG 10543

Bracket




SG 10574

Bracket cover



SG 10575


Bracket cover




SG 10690

Spacer


D. RECESS FITTING

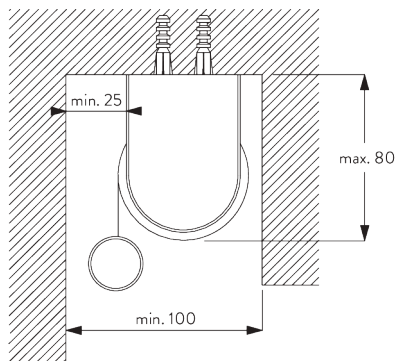


Brackets

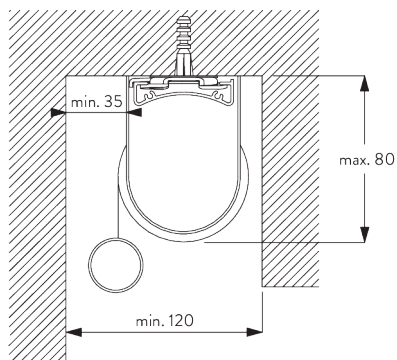

Installation profile SG 10534 and clamps SG 3033 or SG 3044

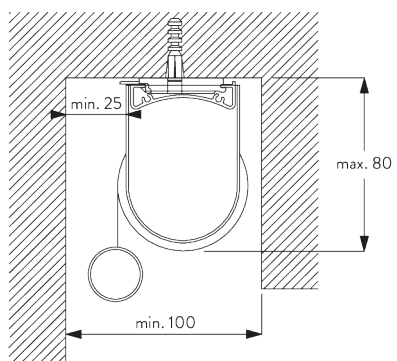


Installation profile SG 10534 and click bracket SG 10539
Not possible with two connected systems!

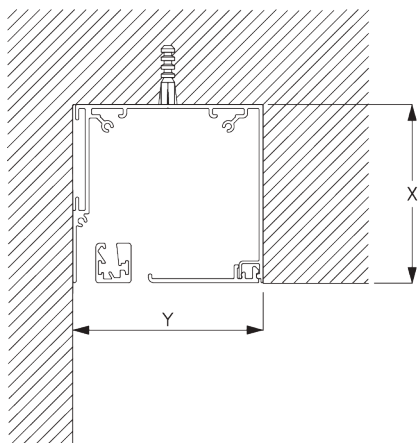

Box


$X = \text{Box } S \ 73 \text{ mm} / \text{Box } L \ 110 \text{ mm}$

$Y = \text{Box } S \text{ min. } 79 \text{ mm} / \text{Box } L \text{ min. } 111 \text{ mm}$




SG 3033

Clamp




SG 3044

Clamp




SG 10534

Installation profile




SG 10539

Bracket




SG 10542

Bracket




SG 10543

Bracket




SG 10574

Bracket cover



SG 10575



Bracket cover





SG 10690

Spacer


E. FITTING WITH SIDE GUIDE OPTION



Single system




Double system (side-by-side installation)




SG 8235

Side guide wire base short




SG 8236

Side guide wire base long




SG 8237

Side guide wire holder




SG 8249

Side guide device




SG 10636

Side guide end cover square




SG 10638

Side guide end cover oval




SG 10640

Side guide end cover round




SG 10641

Side guide eyelet




SG 10642

Side guide wire holder




SG 10643

Side guide wire ø 1.2 mm x 4.2 m




SG 10669

Side guide double base long




SG 10673

Side guide double base short



SG 10701

Side guide double wire holder





SG 10706

Side guide wire ø 1.3 mm x 2.6 m

SYSTEM OPTIONS


A. FABRIC ROLL-OFF




A: Fabric roll-off window side (standard)

B: Fabric roll-off room side (option)

B. INSTALLATION PROFILE



C. SIDE GUIDES

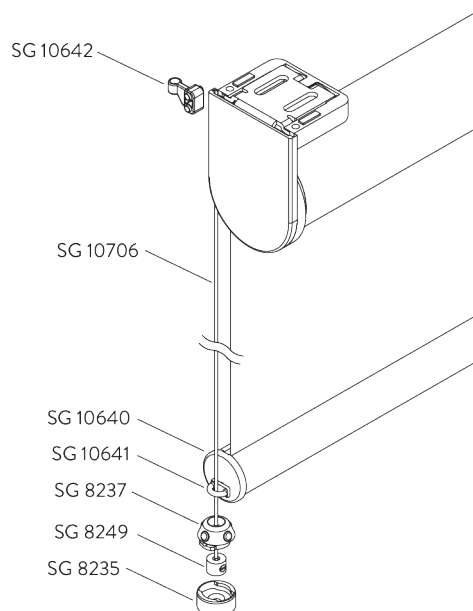

Additional parts:

- 2x SG 8235 Side guide wire base short
- 2x SG 8237 Side guide wire holder
- 2x SG 8249 Side guide device
- 2x SG 10640 Side guide end cover round
- 2x SG 10641 Side guide eyelet
- 2x SG 10642 Side guide wire holder
- 2x SG 10706 Side guide wire $\varnothing$ 1.3 mm x 2.6 m


Optional parts:

- 2x SG 8236 Side guide wire base long
- 2x SG 10636 Side guide end cover square
- 2x SG 10638 Side guide end cover oval
- 2x SG 10643 Side guide wire $\varnothing$ 1.2 mm x 4.2 m
- 1x SG 10669 Side guide double base long
- 1x SG 10673 Side guide double base short
- 1x SG 10701 Side guide double wire holder

Note:

- Light gaps increase when side-guide option is used
- Up to 15° from vertical

D. TWO CONNECTED SYSTEMS




Additional parts:

- 1x SG 10558 Connection tube adapter
- 2x SG 10626 Connection bracket
- 2x SG 10627 Connection flange
- 1x SG 10628 Connection tube adapter
- 1x SG 10632 Connection bracket cover

Note:

- Not possible with 24 V motor SG 10692!


E. TWO SINGLE SYSTEMS SIDE-BY-SIDE



Additional parts:

- 1x SG 10632 Connection bracket cover


F. FASCIA / BOX

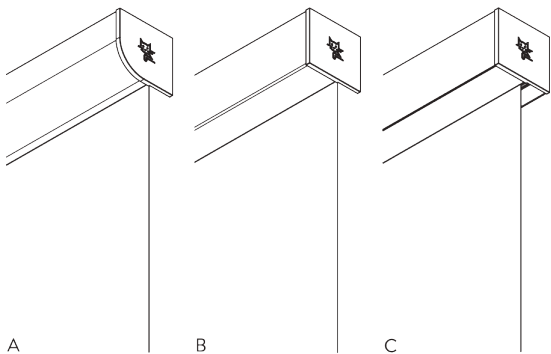

A: Fascia round
B: Fascia square
C: Box

Size
– S: 78 x 73 mm
– L: 110 x 110 mm

Note:
– Only applicable with bottom bar SG 11442
– Not possible with connected systems
– Two systems with one Fascia possible upon request

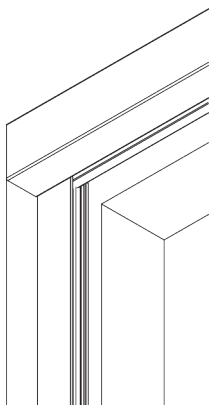

Optional side guide channels SG 11542 to be used with Fascia or Box.

Note:
– Only applicable with inside fitting
– Box: only recess fitting

MOTORS & CONTROLS

A. MOTOR
FEATURES

Motors	20-Series	20-Series	10-Series K	5-Series	24 V DC
	SG 10321	SG 10320	SG 10514	SG 10715	SG 10692
Motor Features					
Soft stop	●	●			
Electronic end-stop	●	●			●
Electronic revolution counter (unlimited revolution)	●	●			●
Mechanical end-stop			●	●	
Mechanical revolution counter (limited revolution)			●	●	
Two intermediate positions possible	●				
Noiseless stop	●	●	●		●
Parallel wiring possible without additional relays	●	●			
Disconnectable motor cable	●	●			
IP class	IP 44	IP 44	IP 44	IP 44	IP 30
Control Features					
Mains power control	●	●	●	●	
Dry contact control					●
SG Control L (built-in receiver)	●				
Suitable for most major home automation systems (with suitable interface)	●	●	●	●	●

B. MOTOR SPECIFICATIONS

Motors	Light gaps* C / D = driving side	Min. system width	Voltage	Current	Frequency	Speed	Frequency receiver
20-Series							
SG 10320 (standard)	C: 13 mm / D: 19 mm	61 cm	230 V AC	0.55 A	50 Hz	70 rpm	-
SG 10321	C: 13 mm / D: 19 mm	61 cm	230 V AC	0.55 A	50 Hz	70 rpm	868/915 MHz
10-Series K							
SG 10514	C: 9 mm / D: 25 mm	50 cm	230 V AC	0.52 A	50 Hz	30 rpm	-
5-Series							
SG 10715	C: 9 mm / D: 25 mm	61 cm	230 V AC	0.485 A	50-60 Hz	28 rpm	-
24 V DC							
SG 10692	C: 13 mm / D: 19 mm	50 cm	24 V DC	0.75 A	-	28 rpm	-

*Light gaps Fascia or Box: C +2 mm / D +2 mm

C. OPERATING METHODS

See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control L



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

D. WIRING DIAGRAMS



Refer to Silent Gliss website.

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, etc.).

Fitting







- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!

Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.







PARTS
















A. STANDARD PARTS


















	SG 4221 Bottom bar
	SG 4226 Double tape 30 mm
	SG 9917 Hirschmann portable socket-outlet STAK 3 N
	SG 10284 O-Ring
	SG 10320 Tubular motor 230V AC, 20 Series S 1.5/70
	SG 10532 Tube ø 41 mm
	SG 10542 Bracket
	SG 10543 Bracket
	SG 10557 Tube adapter
	SG 10574 Bracket cover
	SG 10575 Bracket cover
	SG 10620 Motor flange 10/20-Series
	SG 10621 Tube adapter
	SG 10623 Motor drive

	SG 10639 End cover round
	SG 10668 PVC strip 10 mm

B. OPTIONAL PARTS

	SG 3033 Clamp
	SG 3044 Clamp
	SG 4508 Brush 5x7 mm
	SG 8235 Side guide wire base short
	SG 8236 Side guide wire base long
	SG 8237 Side guide wire holder
	SG 8249 Side guide device
	SG 9916 Hirschmann plug set
	SG 9960 Move server set
	SG 9961 Move transmitter
	SG 10139 Countersunk screw 2.9x6.5
	SG 10293 Cable 230V AC, 2/3/5/10 m
	SG 10300 Radio hand held 1 channel
	SG 10302 Radio hand held 5+1 channel

	SG 10303 Radio hand held 10+2+1 channel		SG 10632 Connection bracket cover		SG 10690 Spacer
	SG 10321 Tubular motor 230V AC, 20 Series S 1.5/70, radio receiver		SG 10633 Bottom bar		SG 10692 Motor 24 V DC, 2/38
	SG 10498 Countersunk screw 2.9x9.5		SG 10634 Bottom bar		SG 10701 Side guide double wire holder
	SG 10514 Tubular motor 230V AC, 10 Series S 3/30 K		SG 10635 End cover square		SG 10706 Side guide wire ø 1.3 mm x 2.6 m
	SG 10534 Installation profile		SG 10636 Side guide end cover square		SG 10708 Adapter set, 24 V DC
	SG 10539 Bracket		SG 10637 End cover oval		SG 10715 Tubular motor 230V AC, 5 Series S 6/28
	SG 10544 Bracket		SG 10638 Side guide end cover oval		SG 10804 Radio hand held 15+5+1 channel
	SG 10558 Connection tube adapter		SG 10640 Side guide end cover round		SG 11180 Clamp
	SG 10622 Tube adapter, 24V DC motor		SG 10641 Side guide eyelet		SG 11322 PT Screw Countersunk KA35x10 WN 1413
	SG 10624 Motor drive, 24V DC motor		SG 10642 Side guide wire holder		SG 11323 PT Screw Countersunk KA35x12
	SG 10625 Motor flange, 10/20-Series		SG 10643 Side guide wire ø 1.2 mm x 4.2 m		SG 11355 Motor drive 5-Series
	SG 10626 Connection bracket		SG 10651 Connection flange		SG 11357 Motor drive 24 V DC
	SG 10627 Connection flange		SG 10669 Side guide double base long		SG 11426 Power supply 24V / 2A including cable with EU/CH plug
	SG 10628 Connection tube adapter		SG 10673 Side guide double base short		SG 11430 Installation profile fascia 73 mm

	SG 11431 Fascia round 73 mm		SG 11450 Bracket left 73 mm		SG 11542 Side guide channel
	SG 11432 Fascia square 73 mm		SG 11451 Bracket right 73 mm		SG 11546 Bracket left 110 mm
	SG 11433 Box case 73 mm		SG 11460 Cover for Hirschmann plug		SG 11547 Bracket right 110 mm
	SG 11434 Box cover 73 mm		SG 11480 Radio wall transmitter 1 channel		SG 11548 Bracket left 110 mm
	SG 11437 Bracket cover round left 73 mm		SG 11490 Radio wall transmitter 5+1 channel		SG 11549 Bracket right 110 mm
	SG 11438 Bracket cover round right 73 mm		SG 11530 Installation profile fascia 110 mm		SG 11550 Bracket left 110 mm
	SG 11439 Bracket cover square left 73 mm		SG 11531 Fascia round 110 mm		SG 11551 Bracket right 110 mm
	SG 11440 Bracket cover square right 73 mm		SG 11532 Fascia square 110 mm		
	SG 11442 Bottom bar		SG 11533 Box case 110 mm		
	SG 11443 End cover		SG 11534 Box cover 110 mm		
	SG 11446 Bracket left 73 mm		SG 11537 Bracket cover round left 110 mm		
	SG 11447 Bracket right 73 mm		SG 11538 Bracket cover round right 110 mm		
	SG 11448 Bracket left 73 mm		SG 11539 Bracket cover square left 110 mm		
	SG 11449 Bracket right 73 mm		SG 11540 Bracket cover square right 110 mm		

