




ROOM DIVIDER/ CUBICLE TRACK SYSTEMS

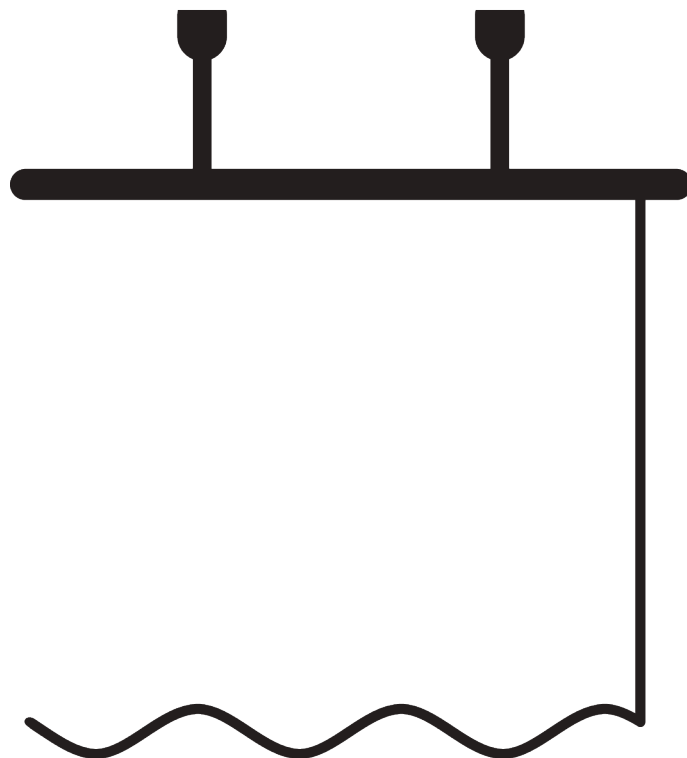

APPLICATION CHART

<u>PAGE</u>	<u>SYSTEM</u>	<u>OPERATION</u>	<u>DIMENSION</u>	<u>DESIGN</u>	<u>WAVE</u>
3	SG 1003		S		
10	SG 6100		S - L		
22	SG 6103		S - L		

SG 1003

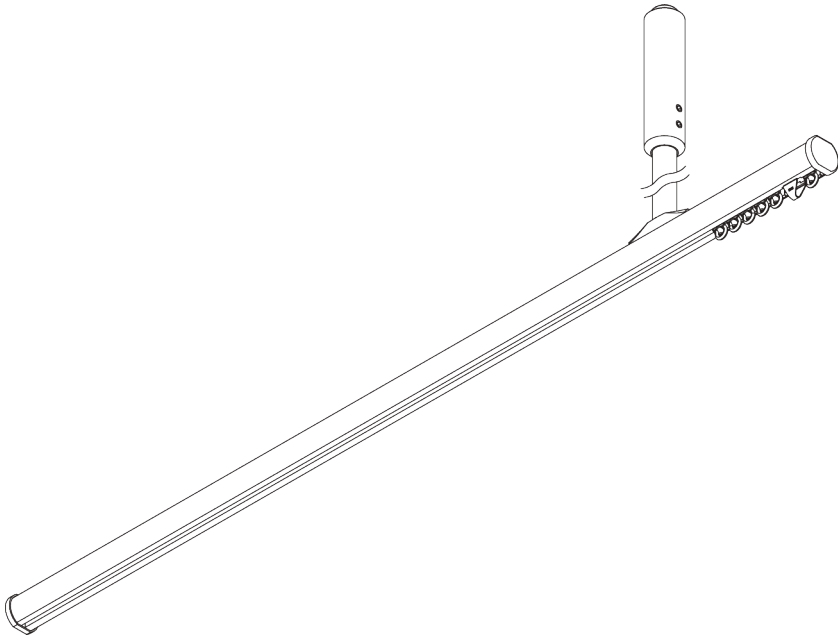

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S
- **Fitting:** suspended, wall, ceiling
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Bendable
- Suspended

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 1003p

Profile

Radius:
✓ 15 cm, 20 cm, >25 cm

B. HOW TO MEASURE

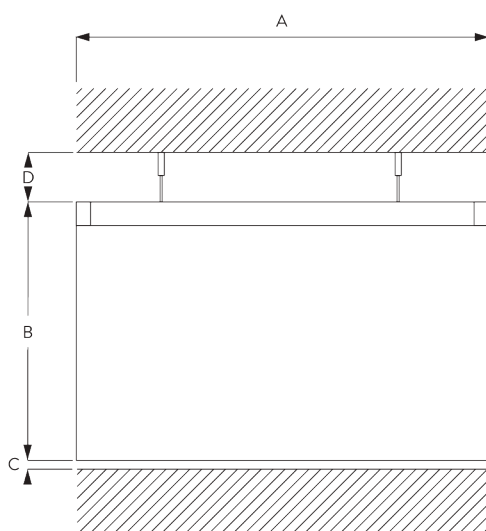

A: System width

B: System height

C: Distance between floor and fabric

D: Distance between ceiling and system

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 1003 Cubicle Curtain Track System. Comprises aluminium profile SG 1003 supplied made to measure in silver anodised or powder coated in white with gliders SG 3533/SG 3089 at 14/m. 2 stops SG 3070. 2 End caps SG 3014. Top fixed with SG 6124/SG 6190 at 800-1500 mm centres. Wall fixed with SG Smart Fix at 800-1500 mm centres.

SV

Silent Gliss SG 1003 dusch/draperi system. Består av aluminiumprofil SG 1003 i specificerad längd i vitlack, alu natur eller angiven RAL färg. 14 st SG 3533/3089 glid med krok pr meter. 2 ändstopp SG 3070. Ändskydd SG 3014. Takmonteras med fäste SG 6124/SG 6190 c/c 800-1500 mm. Vägghängning med SG Smart Fix c/c 800-1500 mm.

NO

Silent Gliss SG 1003 Dusch- og Cubiclesystem Består av aluminiumprofil SG 1003 i spesifisert lengde. Hvitlakkert, alu natur eller spesifisert RAL farge. 14 stk SG 3533/3089 glidere m/krok pr meter. 2 stk endestopp SG 3070. Takmonteres med feste SG 6124/SG6190 c/c 800-1500 mm. Veggmontering med SG Smart Fix c/c 800-1500 mm.

DA


Silent Gliss SG 1003 gardinskinnesystem til kabiner. Består af aluminiumprofil SG 1003 i ønsket længde, sølvanodiseret eller hvid pulverlakering med 14 stk. glidere SG 3533/SG 3089 pr. m. 2 stop SG 3070. 2 endelåg SG 3014. Loftmonteres med SG 6124/SG 6190 i afstande på 800-1500 mm. Vægmonteres med SG Smart Fix med en afstand på 800-1500 mm.

FITTING


A. FITTING INFORMATION

For detailed fitting information, visit the *Silent Gliss* website.

Fixing points




Dust cover




B. CEILING FITTING


Hanger SG 6190 / SG 6196

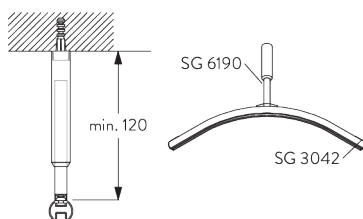


Or variant with SG 6196 double hanger.



SG 3042
Wall bracket





SG 6190
Hanger



SG 6196
Double hanger



Mini hanger SG 6175





SG 6175
Mini hanger


Bracket SG 6124




SG 6124
Bracket

C. WALL FITTING

Smart Fix




Smart Fix with slot SG 11206 - SG 11208:
Screw SG 10492 (M4x8) needed.




Square Smart Fix with slot SG 11216 - SG 11218:
Screw SG 10492 (M4x8) needed.

Smart Fix	X mm
SG 11206 / SG 11216	33-51
SG 11207 / SG 11217	53-71
SG 11208 / SG 11218	73-91
SG 11154	102-130
SG 11155	132-160
SG 11156	182-210

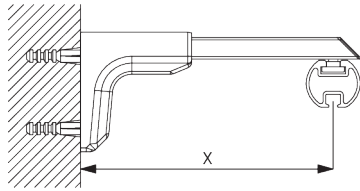

Universal Smart Fix SG 11154 - SG 11156:
Screw SG 11131 (M4x6) needed.




SG 6117
Slot nut




SG 10492
Pan head screw M4x8




SG 11131
Pan head screw with flange
M4x6




SG 11206
Smart Fix with slot 60 mm




SG 11207
Smart Fix with slot 80 mm




SG 11208
Smart Fix with slot 100 mm




SG 11216
Square Smart Fix with slot 60
mm




SG 11217
Square Smart Fix with slot 80
mm




SG 11218
Square Smart Fix with slot
100 mm



SG 11154
Universal Smart Fix 120 mm



SG 11155
Universal Smart Fix 150 mm



SG 11156
Universal Smart Fix 200 mm

GENERAL NOTES

Dimensions

- *Measurements are in mm except where indicated.*
- *Max. kg relates to fabric incl. accessories.*
- *Stack size depends on curtain make-up and fabric thickness.*
- *Distance between gliders max. 80 mm / distance between rollers max. 100 mm.*
- *Recommended distance floor / fabric: 20 mm.*
- *In order to determine system height (B), the smallest room height must be taken into account.*

Fitting




- *Installation by qualified fitter only.*
- *Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.*
- *Qualified fitter must use appropriate screws / fixings for each situation.*
- *Profile lip if applicable to be installed to room side.*

Child Safety



























- *All relevant Silent Gliss systems correspond to child safety EN 13120.*
- *All parties involved must comply with EN 13120.*

PARTS



A. STANDARD PARTS

	SG 1003p Profile
	SG 3014 End cover
	SG 3070 End stop
	SG 3085 Spring stop
	SG 3533 Glider
	SG 6124 Bracket

B. OPTIONAL PARTS

	SG 3042 Wall bracket		SG 10433 Draw rod 125 cm
	SG 3534 Glider 3533 on strip		SG 10434 Draw rod 150 cm
	SG 3582 Hook		SG 10492 Pan head screw M4x8
	SG 6110 Dust cover		SG 11131 Pan head screw with flange M4x6
	SG 6117 Slot nut		SG 11154 Universal Smart Fix 120 mm
	SG 6125 Corner connection piece		SG 11155 Universal Smart Fix 150 mm
	SG 6175 Mini hanger		SG 11156 Universal Smart Fix 200 mm
	SG 6190 Hanger		SG 11206 Smart Fix with slot 60 mm
	SG 6196 Double hanger		SG 11207 Smart Fix with slot 80 mm
	SG 6501 V-Hanger		SG 11208 Smart Fix with slot 100 mm
	SG 6530 V-Hanger		SG 11216 Square Smart Fix with slot 60 mm
	SG 10430 Draw rod 50 cm		SG 11217 Square Smart Fix with slot 80 mm
	SG 10431 Draw rod 75 cm		SG 11218 Square Smart Fix with slot 100 mm
	SG 10432 Draw rod 100 cm		SG 11335 End stop

SG 6100

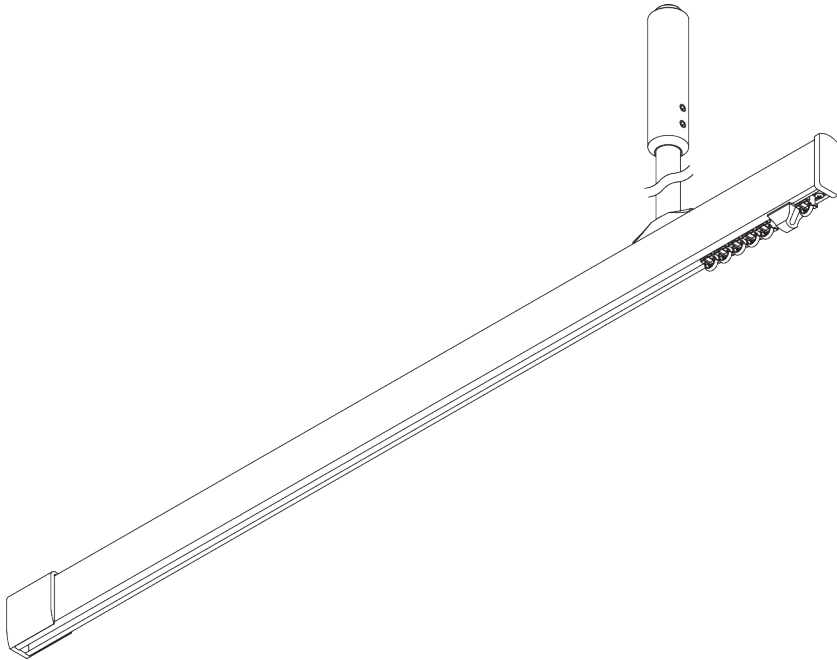

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - L
- **Fitting:** suspended, ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Universal room divider
- 2-component (2C) glider technology
- Wave (2C)
- Suspended
- Versatile layouts
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6101

Profile

Radius:
20 cm, >25 cm

B. HOW TO MEASURE

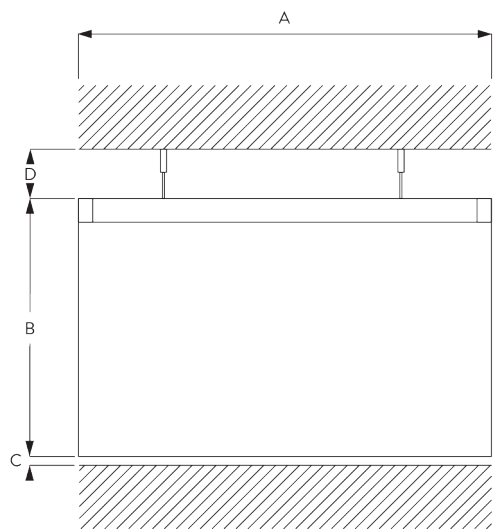

- A: System width
- B: System height
- C: Distance between floor and fabric
- D: Distance between ceiling and system

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 6100 Cubicle Curtain Track System. Comprises aluminium profile SG 6101 supplied made to measure in silver anodised or powder coated in white. 2 stops SG 6065. 2 End caps SG 6611. Supplied with 2C gliders SG 11300/SG 6145 with hooks at 14/m. Top fixed with SG 6124/SG 6190 at 800-3000 mm centres. Wall fixed with SG Smart Fix at 800-3000 mm centres.

SV

Silent Gliss SG 6100 dusch/draperi system. Består av aluminiumprofil SG 6101 i specificerad längd i vitlack, alu natur eller angiven RAL färg.

14 st 11300 SILENT TRACK glid/SG 6145 glid m krok per meter. 2 SG 6065 vridstopp. Ändskydd SG 6611. Takmonteras med fäste SG 6124/SG 6190 c/c 800-3000 mm. Vägghmontering med SG Smart Fix c/c 800-3000 mm.

NO

Silent Gliss SG 6100 Dusj- og Cubiclesystem. Består av aluminiumprofil SG 6101 i spesifisert lengde. Hvitlakkert eller alu natur eller spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glider/SG 6145 glider m/krok pr meter. 2 stk SG6065 vridstopp. Endelukk SG6611 Takmonteres med feste SG 6124/SG6190 c/c 800-3000mm. Veggmontering med SG Smart Fix c/c 800-1500 mm.

DA


Silent Gliss SG 6100 gardinskinnesystem til kabiner. Består af en aluminiumprofil SG 6101 i ønsket længde, sølvanodiseret eller hvid pulverlakering. 2 stop SG 6065. 2 endelåg SG 6611. Leveres med 14 stk. 2C glidere SG 11300/SG 6145 pr m. Loftmonteres med SG 6124/SG 6190 i afstande på 800-3000 mm. Vægmonteres med SG Smart Fix med en afstand på 800-3000 mm.

FITTING


A. FITTING INFORMATION

Fixing points

For detailed fitting information, visit the [Silent Gliss website](#).




Dust cover




B. CEILING FITTING

Hanger SG 6190 / SG 6196

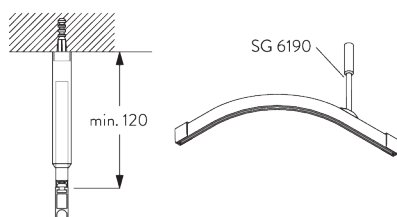


Or variant with SG 6196 double hanger.



SG 6190



Hanger



SG 6196

Double hanger



Mini hanger SG 6175



SG 6175

Mini hanger


Bracket SG 6124




SG 6124

Bracket

V-hanger

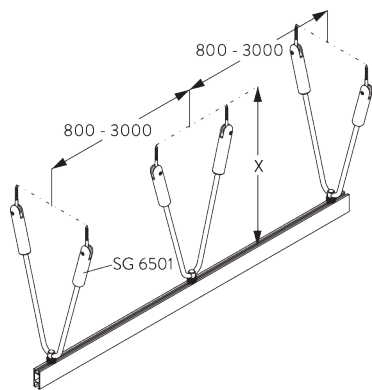


SG 6501:
V-hangers (25°-35°) provide additional lateral stability.




SG 6501

V-Hanger

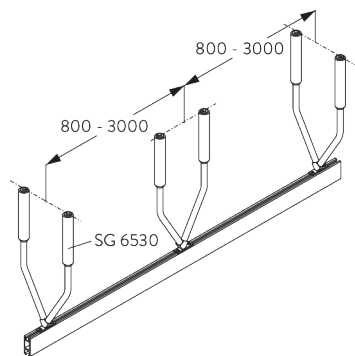

SG 6530:
V-hangers (25°-35°) provide additional lateral stability.




SG 6530


V-Hanger

C. WALL FITTING


Smart Fix




Smart Fix with slot SG 11206 - SG 11208:
Screw SG 10492 (M4x8) needed.



Square Smart Fix with slot SG 11216 - SG 11218:
Screw SG 10492 (M4x8) needed.

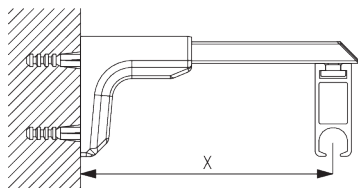

Universal Smart Fix SG 11154 - SG 11156:
Screw SG 11131 (M4x6) needed.




SG 6117
Slot nut




SG 10492
Pan head screw M4x8




SG 11131
Pan head screw with flange
M4x6




SG 11206
Smart Fix with slot 60 mm




SG 11207
Smart Fix with slot 80 mm




SG 11208
Smart Fix with slot 100 mm




SG 11216
Square Smart Fix with slot 60
mm




SG 11217
Square Smart Fix with slot 80
mm




SG 11218
Square Smart Fix with slot
100 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm

Wall support SG 6610
& SG 6614

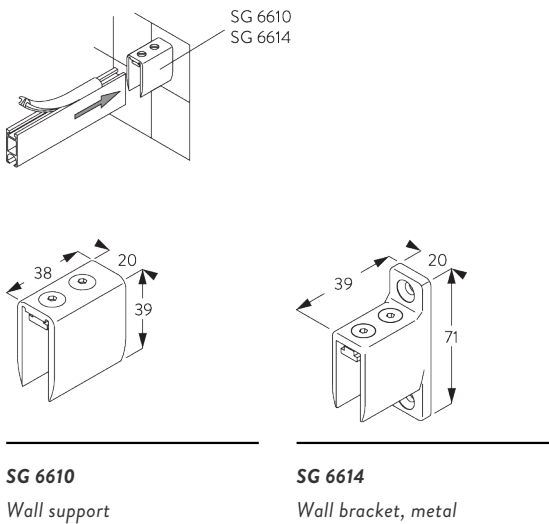


D. PROFILE
JUNCTIONS


Connection bridges
SG 6123 & SG 6514

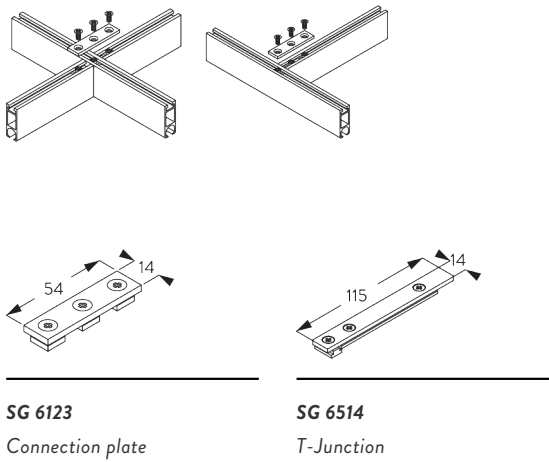

Connecting bridge
SG 6512

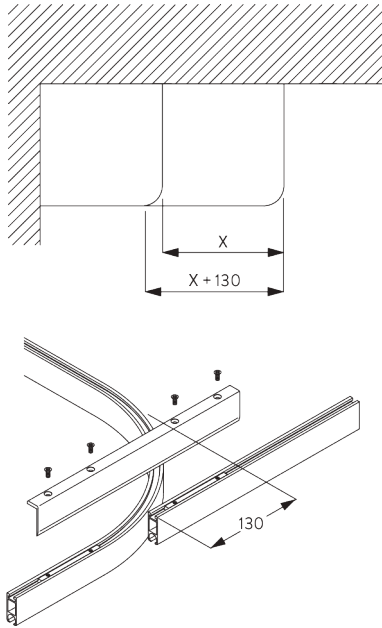


Note: be sure to attach a sketch!




SG 6512
Connection bridge

SYSTEM OPTIONS


A. LAYOUT OPTIONS



A: Hanger rod
B: Wall support





A: Hanger rod
B: Wall support

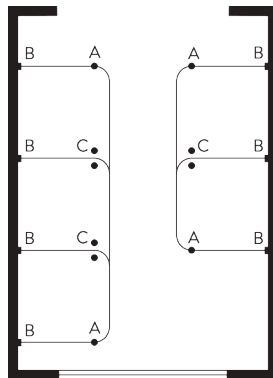

A: Hanger rod
B: Wall support
C: V-hanger

B. WAVE






SG 11295

SG 11302

Standard components:

- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm




SG 2255

SG 6364

SG 6365

SG 6366




SG 10430-34

SG 11303

Optional components (min. radius >25 cm):

- SG 2255 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm

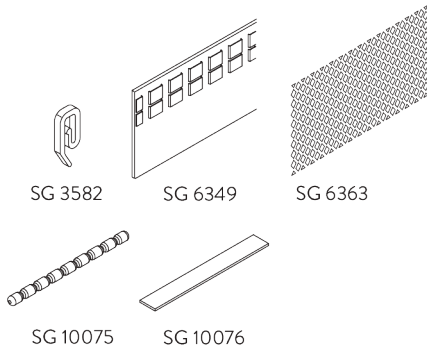

SG 3582

SG 6349

SG 6363


SG 10075

SG 10076

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

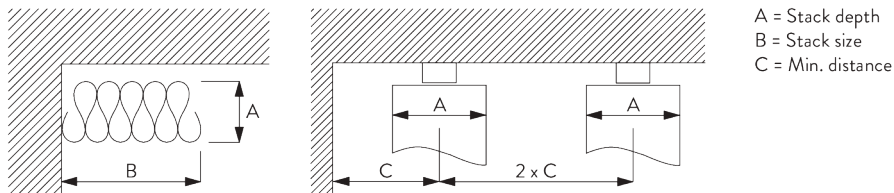

A = Stack depth
B = Stack size
C = Min. distance

2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80

*Stack size B when using optional extension arm increases
by 150 mm per curtain stack!

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting





- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

Child Safety





- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.













PARTS
















A. STANDARD PARTS

	SG 6065 End stop
	SG 6086 Spring stop
	SG 6101 Profile
	SG 6124 Bracket
	SG 6611 End cover
	SG 11300 2C glider



B. OPTIONAL PARTS

	SG 2255 Brake
	SG 3582 Hook
	SG 6053 Spring stop
	SG 6094 Roller
	SG 6098 Roller
	SG 6110 Dust cover
	SG 6112 Connection bridge
	SG 6117 Slot nut
	SG 6123 Connection plate
	SG 6175 Mini hanger
	SG 6190 Hanger
	SG 6196 Double hanger
	SG 6283 Roller
	SG 6349 Wave curtain tape

	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 6501 V-Hanger
	SG 6512 Connection bridge
	SG 6530 V-Hanger
	SG 6610 Wall support
	SG 6614 Wall bracket, metal
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm
	SG 10432 Draw rod 100 cm

	SG 10433 Draw rod 125 cm		SG 11301 2C glider on strip
	SG 10434 Draw rod 150 cm		SG 11302 Wave 2C glider cord 80 mm
	SG 10492 Pan head screw M4x8		SG 11303 Wave 2C glider cord 60 mm
	SG 11131 Pan head screw with flange M4x6		
	SG 11154 Universal Smart Fix 120 mm		
	SG 11155 Universal Smart Fix 150 mm		
	SG 11156 Universal Smart Fix 200 mm		
	SG 11206 Smart Fix with slot 60 mm		
	SG 11207 Smart Fix with slot 80 mm		
	SG 11208 Smart Fix with slot 100 mm		
	SG 11216 Square Smart Fix with slot 60 mm		
	SG 11217 Square Smart Fix with slot 80 mm		
	SG 11218 Square Smart Fix with slot 100 mm		
	SG 11295 End stop		

SG 6103

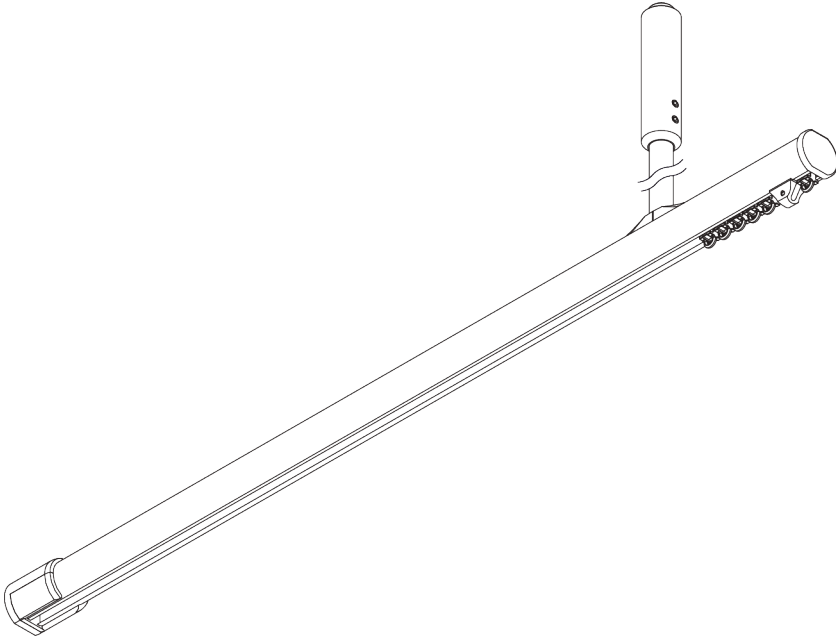

PRODUCT INFORMATION

- **Operation:** hand
- **Range:** S - L
- **Fitting:** suspended, ceiling, wall
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection


Features:

- Universal room divider
- 2-component (2C) glider technology
- Wave (2C)
- Suspended
- Versatile layouts
- Bendable

SYSTEM SPECIFICATIONS

A. PROFILE

Profile and bending information




SG 6103p

Profile

 Radius:
>25 cm

B. HOW TO MEASURE

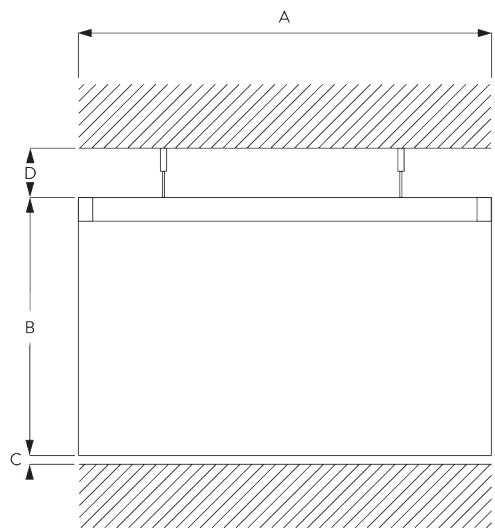

- A: System width
- B: System height
- C: Distance between floor and fabric
- D: Distance between ceiling and system

C. SPECIFICATION

TEXT

EN

Silent Gliss SG 6103 Cubicle Curtain Track System. Comprises aluminium profile SG 6103 supplied made to measure in silver anodised or powder coated in white. 2 stops SG 6065. 2 End caps SG 6630. Supplied with 2C gliders SG 11300/SG 6145 with hooks at 14/m. Top fixed with SG 6124//SG 6190 at 800-3000 mm centres. Wall fixed with SG Smart Fix at 800-3000 mm centres.

SV

Silent Gliss SG 6103 dusch/draperi system. Består av aluminiumprofil SG 6103 i specificerad längd i vitlack, alu natur eller angiven RAL färg.

14 st 11300 SILENT TRACK glid/SG 6145 glid m krok per meter. 2 SG 6065 vridstopp. Ändskydd SG 6630. Takmonteras med fäste SG 6124/SG 6190 c/c 800-3000 mm. Vägghmontering med SG Smart Fix c/c 800-3000 mm.

NO

Silent Gliss SG 6103 Dusj- og Cubiclesystem. Består av aluminiumprofil SG 6103 i spesifisert lengde. Hvitlakkert eller alu natur eller spesifisert RAL farge. 14 stk SG 11300 SILENT TRACK glider/SG 6145 glider m/krok pr meter. 2 stk SG6065 vristopp. Endelokk SG6630 Takmonteres med feste SG 6124/SG6190 c/c 800-3000 mm. Veggmontering med SG Smart Fix c/c 800-1500 mm.

DA


Silent Gliss SG 6103 gardinskinnesystem til kabiner. Består af en aluminiumprofil SG 6103 i ønsket længde, sølvanodiseret eller hvid pulverlakering. 2 stop SG 6065. 2 endelåg SG 6630. Leveres med 14 stk. 2C glidere SG 11300/SG 6145 pr m. Loftmonteres med SG 6124//SG 6190 i afstande på 800-3000 mm. Vægmonteres med SG Smart Fix med en afstand på 800-3000 mm.

FITTING


A. FITTING INFORMATION

Fixing points

For detailed fitting information, visit the Silent Gliss website.




Dust Cover




B. CEILING FITTING

Hanger SG 6190 / SG 6196

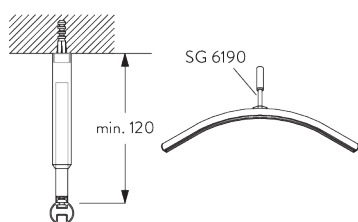


Or variant with SG 6196 double hanger.



SG 6190



Hanger



SG 6196

Double hanger



Mini hanger SG 6175



SG 6175

Mini hanger


Bracket SG 6124




SG 6124

Bracket


V-hanger

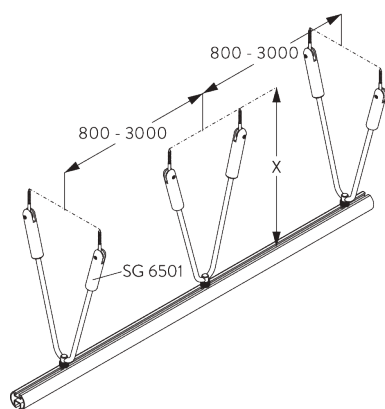


SG 6501:
V-hangers (25°-35°) provide additional lateral stability.



SG 6501
V-Hanger

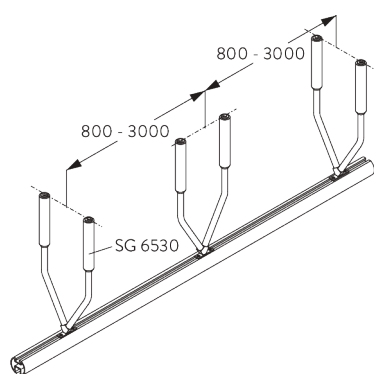


SG 6530:
V-hangers (25°-35°) provide additional lateral stability.




SG 6530
V-Hanger

C. WALL FITTING


Smart Fix




Smart Fix with slot SG 11206 - SG 11208:
Screw SG 10492 (M4x8) needed.



Square Smart Fix with slot SG 11216 - SG 11218:
Screw SG 10492 (M4x8) needed.

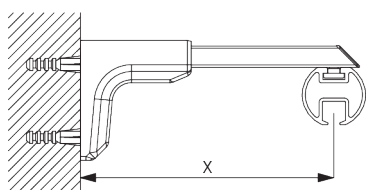

Universal Smart Fix SG 11154 - SG 11156:
Screw SG 11131 (M4x6) needed.




SG 6117
Slot nut




SG 10492
Pan head screw M4x8




SG 11131
Pan head screw with flange
M4x6




SG 11206
Smart Fix with slot 60 mm




SG 11207
Smart Fix with slot 80 mm




SG 11208
Smart Fix with slot 100 mm




SG 11216
Square Smart Fix with slot 60 mm




SG 11217
Square Smart Fix with slot 80 mm




SG 11218
Square Smart Fix with slot
100 mm



SG 11154
Universal Smart Fix 120 mm



SG 11155
Universal Smart Fix 150 mm





SG 11156
Universal Smart Fix 200 mm


Smart Fix	X mm
SG 11206 / SG 11216	33-51
SG 11207 / SG 11217	53-71
SG 11208 / SG 11218	73-91
SG 11154	102-130
SG 11155	132-160
SG 11156	182-210

D. WALL SUPPORT


Bracket SG 6620



SG 6123
Connection plate





SG 6620
Wall bracket




SG 6631
Connection piece

E. PROFILE
JUNCTIONS

Connection bridge
SG 6521

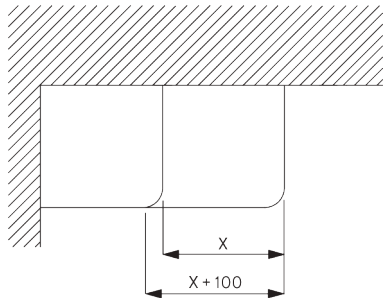



Note: be sure to attach a sketch!



SG 6521
Connection bridge

Connection set
SG 6635






SG 6635


Connection bridge set

SYSTEM OPTIONS


A. LAYOUT OPTIONS



A: Hanger rod
B: Wall support





A: Hanger rod
B: Wall support

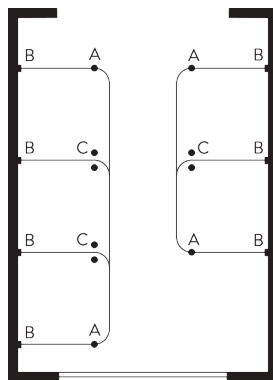

A: Hanger rod
B: Wall support
C: V-hanger

B. WAVE






SG 11295

SG 11302

Standard components:

- SG 11295 End stop
- SG 11302 Wave 2C glider cord 80 mm




SG 2255

SG 6364

SG 6365

SG 6366




SG 10430-34

SG 11303

Optional components:

- SG 2255 Brake
- SG 6364 Wave extension
- SG 6365 Wave hanger
- SG 6366 Wave carrier for draw rod
- SG 10430-34 Draw rod
- SG 11303 Wave 2C glider cord 60 mm

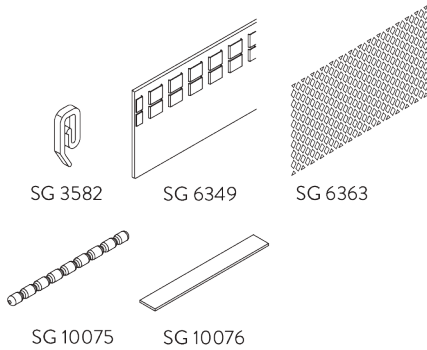

SG 3582

SG 6349

SG 6363



SG 10075

SG 10076

Curtain components:

- SG 3582 Hook
- SG 6349 Wave curtain tape
- SG 6363 Wave top hemming tape
- SG 10075 Lead weight 50 gr/m
- SG 10076 Fabric weight

Wave stack depth - 2C glider cord (standard components)

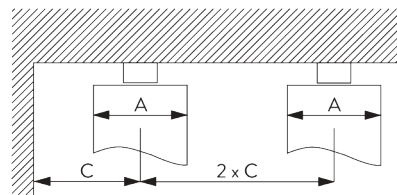

A = Stack depth
B = Stack size
C = Min. distance

2C Glider cord SG 11302	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
80	6	~2.1	140	180 per metre of track	90
80	7	~2.3	160	180 per metre of track	100

2C Glider cord SG 11303	Pockets between hooks	Approx. curtain fullness	Stack depth A	Stack size B*	Min distance C
60	4	~2.1	100	230 per metre of track	70
60	5	~2.3	120	230 per metre of track	80

*Stack size B when using optional extension arm increases
by 150 mm per curtain stack!

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories.
- Stack size depends on curtain make-up and fabric thickness.
- Distance between gliders max. 80 mm / distance between rollers max. 100 mm.
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting





- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.

Child Safety






- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.










PARTS
















A. STANDARD PARTS

	SG 6065 End stop
	SG 6086 Spring stop
	SG 6103p Profile
	SG 6124 Bracket
	SG 6630 End cover
	SG 11300 2C glider

B. OPTIONAL PARTS

	SG 2255 Brake
	SG 3582 Hook
	SG 6053 Spring stop
	SG 6094 Roller
	SG 6098 Roller
	SG 6110 Dust cover
	SG 6117 Slot nut
	SG 6123 Connection plate
	SG 6125 Corner connection piece
	SG 6175 Mini hanger
	SG 6190 Hanger
	SG 6196 Double hanger
	SG 6283 Roller
	SG 6349 Wave curtain tape

	SG 6363 Wave top hemming tape
	SG 6364 Wave extension
	SG 6365 Wave hanger
	SG 6366 Wave carrier for draw rod
	SG 6501 V-Hanger
	SG 6521 Connection bridge
	SG 6530 V-Hanger
	SG 6620 Wall bracket
	SG 6631 Connection piece
	SG 6635 Connection bridge set
	SG 10075 Lead weight 50 g/m
	SG 10076 Fabric weight
	SG 10430 Draw rod 50 cm
	SG 10431 Draw rod 75 cm

	SG 10432 Draw rod 100 cm		SG 11295 End stop
	SG 10433 Draw rod 125 cm		SG 11301 2C glider on strip
	SG 10434 Draw rod 150 cm		SG 11302 Wave 2C glider cord 80 mm
	SG 10492 Pan head screw M4x8		SG 11303 Wave 2C glider cord 60 mm
	SG 11131 Pan head screw with flange M4x6		
	SG 11154 Universal Smart Fix 120 mm		
	SG 11155 Universal Smart Fix 150 mm		
	SG 11156 Universal Smart Fix 200 mm		
	SG 11206 Smart Fix with slot 60 mm		
	SG 11207 Smart Fix with slot 80 mm		
	SG 11208 Smart Fix with slot 100 mm		
	SG 11216 Square Smart Fix with slot 60 mm		
	SG 11217 Square Smart Fix with slot 80 mm		
	SG 11218 Square Smart Fix with slot 100 mm		

The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the worlds` smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Silent Gliss Nordic AB

Travbanegatan 9
213 77 Malmö
Sweden
T +46 40 55 52 50
info@silentgliss.se

Byggdøy Allé 111A
0273 Oslo
Norway
T +47 24 11 80 60
info@silentgliss.no

Denmark
T +45 36 77 67 00
info@silentgliss.dk

silentgliss.se
silentgliss.no
silentgliss.dk